



ECODIVIDER

ABSORPTION

PRODUCT CHARACTERISTICS

EcoDivider are mobile partitions used to freely divide office space. They are designed to reduce noise and reverberation and separate individual zones. With the screens you can separate individual workstations, groups of positions, the employee section from the communication path or create a special relaxation zone or conversation zone.

EcoDivider provides visual separation of individual positions and adequate privacy for employees. The use of compressed polyester wool with increased density provides appropriate acoustic insulation and a high sound absorption coefficient.

The walls are available in both full (smooth or upholstered) and perforated versions. The collection consists of over 90 unique designs arranged thematically. All series are in the form of screens suspended from the ceiling on adjustable steel cables or on a sliding rail.







ECODIVIDER

ABSORPTION




MATERIALS

EcoDivider products are made of compressed polyester fibers recovered from PET bottles in the recycling process. Unlike mineral wool, this material does not collect dust, does not get dirty, is environmentally friendly and safe. It is also resistant to mechanical damage and deformation. The product is fully recyclable. It is odorless, mold resistant and does not emit toxic substances. It has a high fire rating: B, s1, d0. In the padded version, the screens are additionally covered with an acoustic foil and a special finishing strip.


	ABSORPTION COEFFICIENT	≥ 0,85
	ABSORPTION CLASS	B
	FIRE CLASSIFICATION	B, s1, d0
	INSULATION	high
	ANTISTATIC	yes
	ASSEMBLY	Link suspension, free standing, on rails
	REACTION TO UV RAYS	No discolouration
	ECOLOGICAL PRODUCT	yes

INSTALLATION

The panels in the free-standing version are mounted on metal legs. The suspended version is mounted using an aluminum profile and adjustable steel cables or a sliding rail.

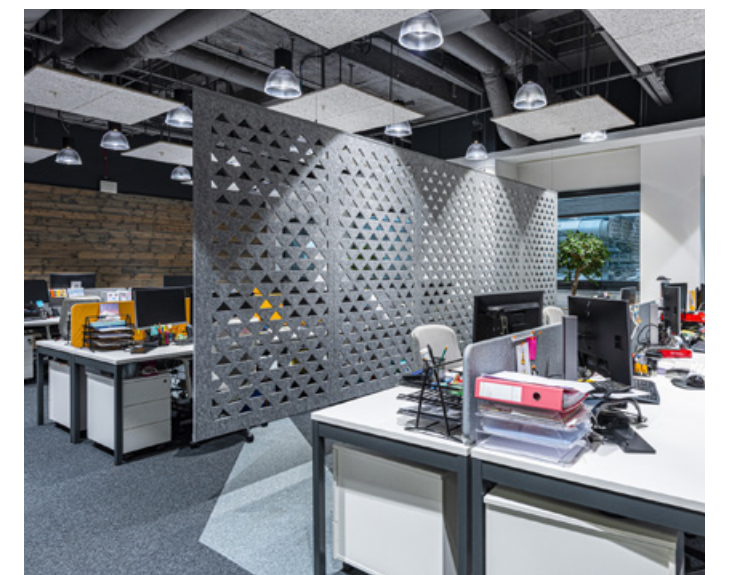

TECHNICAL DRAWINGS

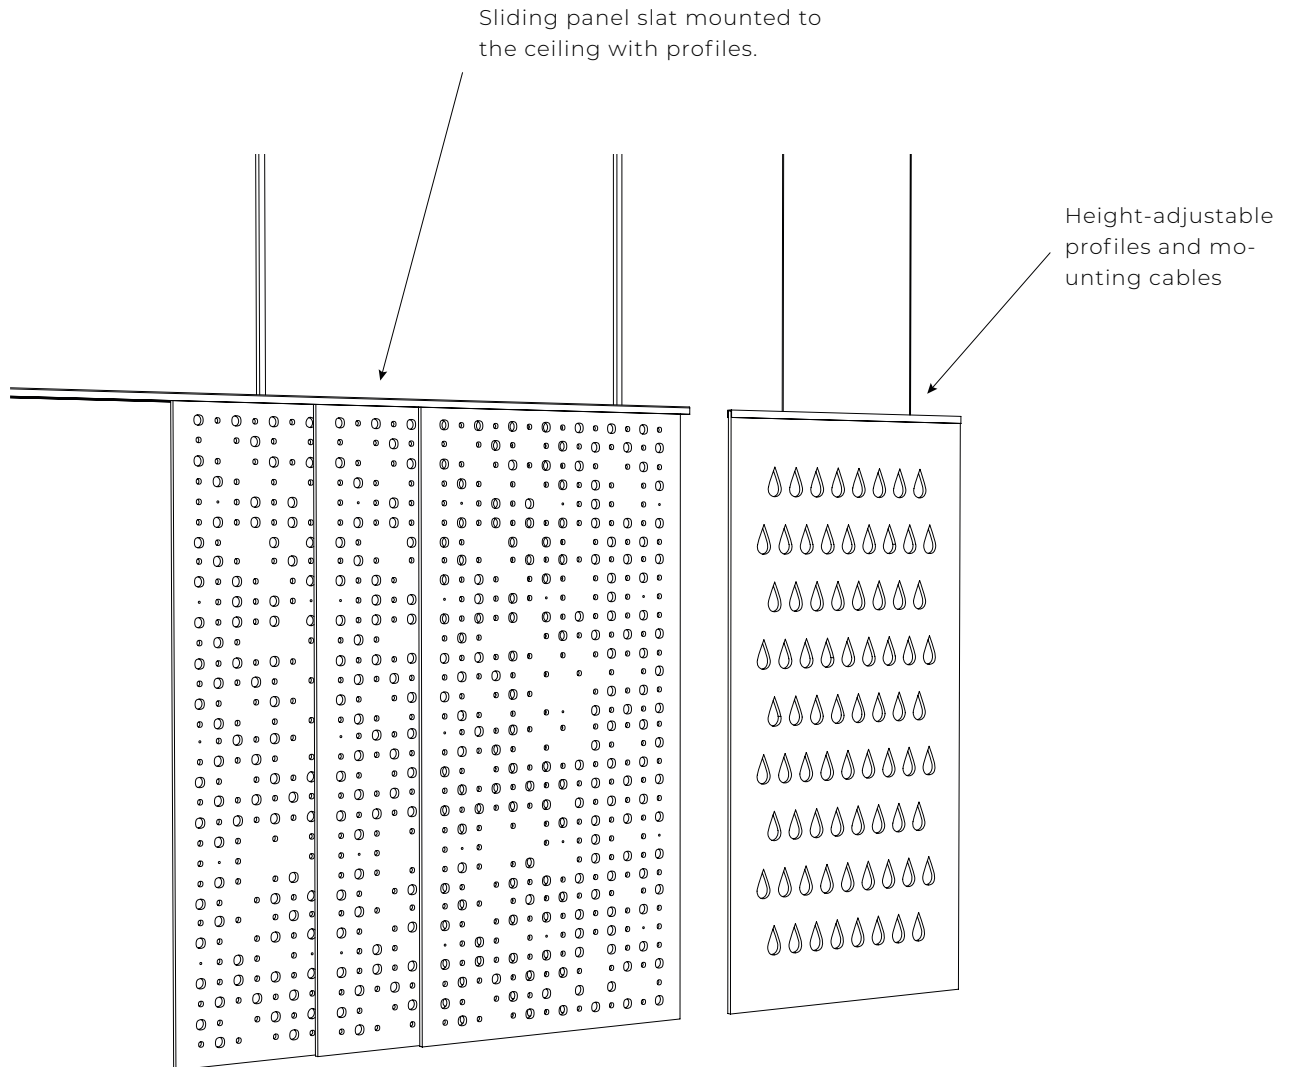

PANEL THICKNESS:

Suspended panels: 9 mm, 15 mm

UP-TO-DATE CATALOGUE OF AVAILABLE PATTERNS:

- Nyquista EcoScreen Collection_2020 ENG.pdf
- Nyquista EcoScreen Collection_2020 PL.pdf